


# Computer Graphics

11569: Licenciatura em Engenharia Informática

Lab. I — C++ Explained



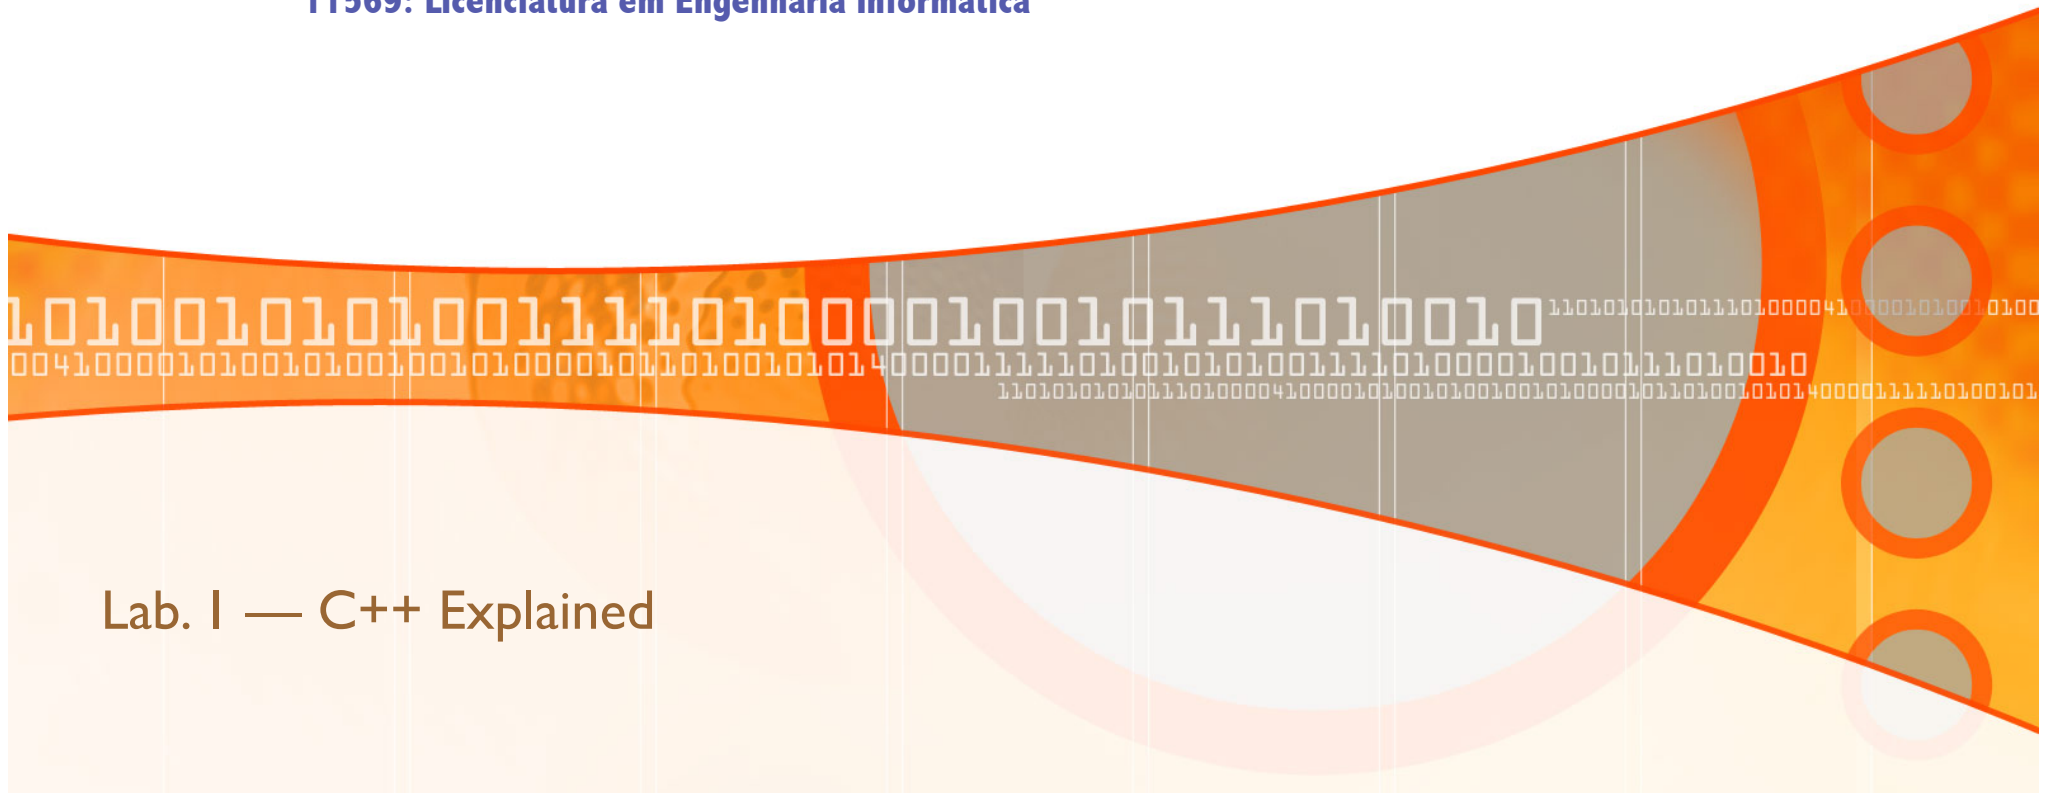

# Outline

Variables, pointers, and references

Functions

Variables, pointers, and references



# VARIABLES, POINTERS, AND REFERENCES



# Variables, pointers, and references

## Variable:

- It is a name/identifier that represents a value stored in memory.

## Pointer variable:

- It is a name/identifier that represents an address (of memory) stored in memory.

## Reference variable:

- It is a pointer variable.
- But, it also works as an alias to the pointed variable, so that it can be used as a usual variable.
- It must be initialized at the declaration stage.

# Variables, pointers, and references (cont'd)

## Variable:

- It is a name/identifier that represents a value stored in memory.

## Pointer variable:

- It is a name/identifier that represents an address (of memory) stored in memory.

## Reference variable:

- It is a pointer variable, but it also works as an alias of the pointed variable.
- It must be initialized at the declaration stage.

## Example:

```
int b;           // usual variable
int& a = b;     // reference variable
a = 10;

int b;           // usual variable
int *a = &b;    // pointer variable
*a = 10;
```

# FUNCTIONS





# Function

## Header:

- Specifies **WHAT** is done by the function.

## Body:

- Describes **HOW** the function does the specified work.

## Examples:

```
return-data-type function-name (parameter list)
{
    constant declarations
    variable declarations

    other C++ statements

    return value
}
```

**value-returning function**

```
void function-name (parameter list)
{
    constant declarations
    variable declarations

    other C++ statements
}
```

**non value-returning function**

# Function's formal parameters

## Function's prototype

### Formal parameters:

- The argument names in the function header.

### Example:

- `x` and `y` in the following function:

```
int FindMax(int x, int y)
{
    int maximum;

    if(x>=y)
        maximum = x;
    else
        maximum = y;

    return maximum
}
```

### Prototype:

- The use of function prototypes permits *error checking* of data types by the compiler.
- It also ensures conversion of all arguments passed to the function to the declared argument data type when the function is called.
- It the function header followed by “;”. The argument names are not necessary.

### Example:

- `int FindMax(int, int);`



# Function's actual parameters

## Calling a function

### Actual parameters:

- The argument names in the function call are referred to as *actual parameters*.

### Example:

- firstnum and secnum in the following function:

```
#include <iostream.h>

int FindMax(int, int);           // function prototype

int main()
{
    int firstnum, secnum, max;

    cout << "\nEnter two numbers: ";
    cin >> firstnum >> secnum;
    max=FindMax(firstnum, secnum); // the function is called here
    cout << "The maximum is " << max << endl;

    return 0;
}
```



## Calling a function by value

### How does it work?:

- The function receives a *copy* of the actual parameter values
- The function cannot change the values of the actual parameters.

### Example:

- The values of firstnum and secnum are copied into x and y arguments, respectively, of the FindMax function (see previous transparency).

# Calling a function by reference

## How does it work?:

- Very useful when we need a function which "returns more than one value".
- The formal parameter becomes an *alias* for the actual parameter.
- The function can change the values of the actual parameters.

## Example:

```
#include <iostream.h>
void newval(float&, float&); // function prototype
int main()
{
    float firstnum, secnum;

    cout << "Enter two numbers: ";
    cin >> firstnum >> secnum;
    newval(firstnum, secnum);
    cout << firstnum << secnum << endl;

    return 0;
}

void newval(float& xnum, float& ynum)
{
    xnum = 89.5;
    ynum = 99.5;
}
```

# Differences between pointers and references in calling functions

## Two differences:

- A reference parameter is a *constant pointer* (after initializing it, it can't be changed).
- References are *dereferenced automatically* (no need to use the dereferencing op. \*).

## Example:

```
#include <iostream.h>
void newval(float*, float*);
int main()
{
    float firstnum, secnum;
    cout << "Enter two numbers: ";
    cin >> firstnum >> secnum;
    newval(&firstnum, &secnum);
    cout << firstnum << secnum << endl;
    return 0;
}

void newval(float* xnum, float* ynum)
{
    *xnum = 89.5;
    *ynum = 99.5;
}
```

calling function with pointer arguments

```
#include <iostream.h>
void newval(float&, float&);
int main()
{
    float firstnum, secnum;
    cout << "Enter two numbers: ";
    cin >> firstnum >> secnum;
    newval(firstnum, secnum);
    cout << firstnum << secnum << endl;
    return 0;
}

void newval(float& xnum, float& ynum)
{
    xnum = 89.5;
    ynum = 99.5;
}
```

calling function with reference arguments



# Calling a function by reference

## The “const” modifier

### How does it work?:

- Calling by reference is the *preferred* way to pass a large structure or class instances to functions, simply because the entire structure need not be copied each time it is used!!
- C++ provides us with protection against accidentally changing the values of variables passed by reference with the *const* operator

Example (function prototype):

```
int FindMax(const int&, const int&);
```

Example (function header):

```
int FindMax(const int& x, const int& y)
```

# Function overloading

## How does it work?:

- C++ provides the capability of using the same function name for more than one function (*function overloading*)
- The compiler must be able to determine which function to use based on the *number and data types* of the parameters.
- Warning: creating overloaded functions with identical parameter lists and *different return types* is a syntax error!!

## Example:

```
void cdabs(int x)
{
    if (x<0)
        x = -x;
    cout << "The abs value of the integer is " << x << endl;
}

void cdabs(float x)
{
    if (x<0)
        x = -x;
    cout << "The abs value of the float is " << x << endl;
}
```



# **STRUCTURES AND CLASSES**

# What is a structure?

## Data type composition:

- It is an compound data type built using elements of other types.
- Declaring a structure requires declaring its *members* and their data types.

## Example:

```
struct RECTANGLE
{
    float height;
    float width;
    int xpos;
    int ypos;
};
```

## Declaration:

- They are declared like variables of any other type.

```
RECTANGLE R;
RECTANGLE &RRef = R;
RECTANGLE *RPtr = &R;
```



# Accessing members of a structure

## Dot operator ( . ):

- Applies to both variables and references.

Example:

```
R.height = 15.34;  
RRef.height = 15.34;
```

## Arrow operator ( -> ):

- Applies to pointers.

Example:

```
RPtr->height = 15.34;  
(*RPtr).height = 15.34;
```

# Declaration of member functions/methods of a structure

## Member functions:

- Functions which operate on the data of the structure.
- The prototype of a member function appears within the structure definition.
- Usually, the declaration of structs appears in a separate file .h

## Example:

**rectangle.h**

```
struct RECTANGLE
{
    float height;
    float width;
    int xpos;
    int ypos;

    void draw();           // draw member function
    void position(int,int); // position member function
    void move(int,int);   // move member function
};
```

# Implementation of member functions/methods of a structure

## Member functions:

- Usually, they are implemented outside the structure.
- Usually, the implementation of member functions appears in a separate file .cpp
- The :: "scope resolution operator" is necessary for that.

## Example:

`rectangle.cpp`

```
void RECTANGLE::draw()
{
    cout << "position is  " << xpos << ypos << endl;
}

void RECTANGLE::position(int x, int y)
{
    xpos = x;
    ypos = y;
}

void RECTANGLE::move(int dx, int dy)
{
    xpos += dx;
    ypos += dy;
}
```



## Referring to a member function

### Accessing to a member function:

- This is done in the same way as for struct variables.

### Examples:

```
R.draw( );  
RRef.position(100,200);  
RPtr->move(30,30);
```

# Controlling access to members

## Access specifiers:

- Most common member access specifiers are: public and private.
- The *private* keyword specifies that the structure members following it are private to the structure and can only be accessed by member functions (and by *friend* functions).

## Examples:

```
rectangle.h
struct RECTANGLE
{
    private:
    float height;
    float width;
    int xpos;
    int ypos;

    public:
    void draw();           // draw member function
    void position(int,int); // position member function
    void move(int,int);   // move member function
};
```

# What is a class?

## Definition:

- Practically, there are no differences between structures and classes.
  - Structures have all of their members public by default.
  - A class is a structure which has all of its members private by default.

## Example:

```
rectangle.h
class RECTANGLE
{
    private:                                // only for clarity
        float height;
        float width;
        int xpos;
        int ypos;

    public:
        void draw();                        // draw member function
        void position(int,int);            // position member function
        void move(int,int);                // move member function
};
```

# What is a constructor?

## Definition:

- It is a member function which initializes a class instance (or object).
- A constructor has:
  - the same name as the class itself,
  - no return type.

## Example:

```
rectangle.h
class RECTANGLE
{
    private:
        float height;
        float width;
        int xpos;
        int ypos;

    public:
        void RECTANGLE(float, float); // constructor
        void draw();
        void position(int, int);
        void move(int, int);
};
```

## What is a constructor? (cont'd)

```
void RECTANGLE::RECTANGLE(float h, float w)
{
    height = h;
    width = w;
    xpos = 0;
    ypos = 0;
}
```

### How does a constructor work?:

- A constructor is called automatically whenever a new instance of a class is created.
- You must supply the arguments to the constructor when a new instance is created.
- If you do not specify a constructor, the compiler generates a default constructor for you (expects no parameters and has an empty body).
- *Warning:* attempting to initialize a data member of a class explicitly in the class definition is a syntax error. It is up to constructors to initialize member variables.

### Example:

```
void main()
{
    RECTANGLE R(20.0,30.0);
    R.position(100,100);
    R.draw();
}
```



rectangle.cpp

```
void RECTANGLE::RECTANGLE()
{
    height = 0;
    width = 0;
    xpos = 0;
    ypos = 0;
}
```

## Overloading a constructor

### Multiple constructors:

- You can have more than one constructor in a class, as long as each has a different list of arguments.

### Example:

rectangle.h

```
class RECTANGLE
{
    private:
        float height;
        float width;
        int xpos;
        int ypos;

    public:
        void RECTANGLE(); // constructor
        void RECTANGLE(float, float); // constructor
        void draw();
        void position(int, int);
        void move(int, int);
};
```

main.cpp

```
void main()
{
    RECTANGLE R1(20.0, 30.0);
    RECTANGLE R2();

    R1.draw();
    R2.draw();
}
```

# Object composition in classes

## Definition:

- A class may have objects of other classes as members.

## Example:

```
rectangle.h
class RECTANGLE
{
    private:
        float height;
        float width;
        int xpos;
        int ypos;
        COLOR c;

    public:
        void
        RECTANGLE(float, float, int, int, int);
        void draw();
        void position(int, int);
        void move(int, int);
};
```

```
color.h
class COLOR
{
    private:
        int R;
        int G;
        int B;

    public:
        void COLOR(int, int, int);
};
```

## Object composition in classes (cont'd)

**rectangle.cpp**

```
void RECTANGLE::RECTANGLE(float h,float w,int r,int g,int b):c(r,g,b)
{
    height = h;
    width = w;
    xpos = 0;
    ypos = 0;
}
```

**color.cp**

```
void COLOR::COLOR(int r,int g,int b)
{
    R = r;   G;= g;   B = b;
};
```

**main.cpp**

```
void main()
{
    RECTANGLE R(20.0,30.0,1,0,1);
    R.draw();
}
```

# What is a destructor?

## Definition:

- Function that deletes an object.
- A destructor function is called automatically when the object goes out of scope:
  - the function ends;
  - the program ends;
  - a block containing temporary variables ends;
  - a *delete* operator is called.
- A constructor has:
  - the same name as the class itself, but is preceded by a tilde (~),
  - no arguments and return no values.

## Example:

string.h

```
class STRING
{
    private:
        char *s;
        int size;

    public:
        STRING(char*);    //
        constructor
        ~STRING();        // destructor
};
```

string.cpp

```
STRING::STRING(char *c)
{
    size = strlen(c);
    s = new char[size+1];
    strcpy(s,c);
}

STRING::~~STRING ()
{
    delete []s;
}
```

# What is a copy constructor?

string.h

```
class STRING
{
    private:
        char *s;
        int size;

    public:
        STRING(char*);
        ~STRING();
        STRING(const STRING&); // copy
        constructor

        void print();
        void copy(char*);
};
```

string.cpp

```
STRING::STRING(const STRING& aString)
{
    size = aString.size;
    s = new char[size+1];
    strcpy(s, aString.s);
}
```

main.cpp

```
void main()
{
    STRING str1("George");
    STRING str2 = str1;

    str1.print();    // what is printed ?
    str2.print();

    str2.copy("Mary");
    str1.print();    // what is printed now ?
    str2.print();

}
```

## Definition:

- It is a member function which initializes an object using another object of the same class.
- In the absence of a copy constructor, the C++ compiler builds a default copy constructor for each class which is doing a memberwise copy between objects.
- Default copy constructors work fine unless the class contains pointer data members ... Why?

## Example:



# Summary

Variables, pointers, and references

Functions

Structures and classes