

Unix Programming Tools

By Parlante, Zelenski, and many others

Copyright ©1998-99, Stanford University

Introduction

This document explains the overall edit-compile-link-debug programming cycle and introduces several common Unix programming tools— `gcc`, `make`, `gdb`, `emacs`, and the Unix shell. The goal is to describe the major features and typical uses of the tools and show how they fit together with enough detail for simple projects.

Contents

Introduction — the compile-link process	1
The <code>gcc</code> compiler/linker	2
The <code>make</code> project utility	4
The <code>gdb</code> debugger	8
The <code>emacs</code> editor	13
Summary of Unix shell commands	15

This is document #107, Unix Programming Tools, in the CS Education Library at Stanford. This and other free educational materials are available at <http://cslibrary.stanford.edu/>. This document is free to be used, reproduced, or redistributed so long as this notice is clearly reproduced at its beginning.

This is a beta draft

Note: this is basically a quick-n-dirty handout we've used to introduce CS students to the Unix programming environment. It has not been edited or improved especially before being added to the CS Education Library. It may get edited and polished up sometime in the future — in any case it will keep its permanent URL above. This is the first public draft of the document on Jan 26th, 1999. Please send suggestions or comments to nick.parlante@cs.stanford.edu.


Other Resources

This document is an introduction — for more detailed information about a particular tool, see the tool's `man` pages and `xinfo` entries. Also, O'Reilly & Associates publishes a pretty good set of references for many Unix related tools (the books with animal pictures on the cover). For basic coverage of the C programming language, see CS Education Library #101, (<http://cslibrary.stanford.edu/101/>).

The Compile Process

Before going into detail about the individual tools themselves, it is useful to review the overall process that goes into building an executable program. After the source text files have been edited, there are two steps in the build process: *compiling* and *linking*. Each

source file (.c) is compiled into an object file (.o). Each object file contains a system dependent, relocatable compiled representation of the program as described in its source file. Typically the file name of an object module is the same as the source file that produced it, but with a “.o” extension — “main.c” is compiled to produce “main.o”. The individual object files are then linked together to produce a single executable file which the system loader can use when the program is actually run. The link step will also bring in library object files that contain the definitions of library functions such as `printf()` and `malloc()`. The overall process is illustrated in the following drawing...

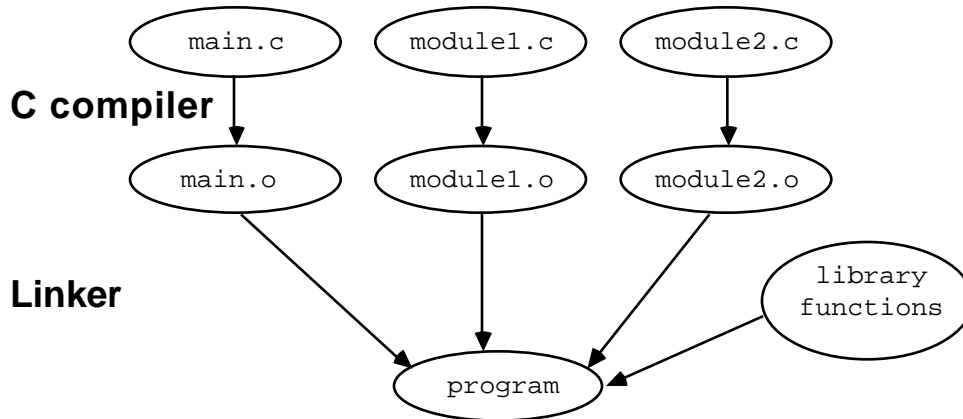

Section 1 — gcc

The following discussion is about the gcc compiler, a production of the open-source GNU project (www.gnu.org). Using gcc has several advantages— it tends to be pretty up-to-date and reliable, it's available on a variety of platforms, and of course it's free and open-source. Gcc can compile C, C++, and objective-C. Gcc is actually both a compiler and a linker. For simple problems, a single call to gcc will perform the entire compile-link operation. For example, for small projects you might use a command like the following which compiles and links together three .c files to create an executable named “program”.

```
gcc main.c module1.c module2.c -o program
```

The above line equivalently could be re-written to separate out the three compilation steps of the .c files followed by one link step to build the program.

```
gcc -c main.c                ## Each of these compiles a .c
gcc -c module1.c
gcc -c module2.c
gcc main.o module1.o module2.o -o program    ## This line links the .o's
                                              ## to build the program
```

The general form for invoking gcc is...

```
gcc options files
```

where *options* is a list of command flags that control how the compiler works, and *files* is a list of files that gcc reads or writes depending on the options

Command-line options

Like most Unix programs, gcc supports many command-line options to control its operation. They are all documented in its man page. We can safely ignore most of these options, and concentrate on the most commonly used ones, which are: `-c`, `-o`, `-g`, `-Wall`, `-I`, `-L`, and `-l`.

- `-c files` Direct gcc to compile the source files into an object files without going through the linking stage. Makefiles (below) use this option to compile files one at a time.
- `-o file` Specifies that gcc's output should be named *file*. If this option is not specified, then the default name used depends on the context...(a) if compiling a source `.c` file, the output object file will be named with the same name but with a `.o` extension. Alternately, (b) if linking to create an executable, the output file will be named `a.out`. Most often, the `-o` option is used to specify the output filename when linking an executable, while for compiling, people just let the default `.c/.o` naming take over.

It's a memorable error if your `-o` option gets switched around in the command line so it accidentally comes before a source file like `“...-o foo.c program”` — this can overwrite your source file — Woo Hoo!

- `-g` Directs the compiler to include extra debugging information in its output. We recommend that you always compile your source with this option set, since we encourage you to gain proficiency using the debugger such as `gdb` (below).

Note – the debugging information generated is for `gdb`, and could possibly cause problems with other debuggers such as `dbx`. This is because there is typically more information stored for `gdb` that `dbx` will choke on. Additionally, on some systems, some MIPS based machines for example, this information cannot encode full symbol information and some debugger features may be unavailable.

- `-Wall` Give warnings about a lot of syntactically correct but dubious constructs. Think of this option as being a way to do a simple form of compile-time error checking. We highly recommend that you compile your code with this option set.

Most of the time the constructs that are flagged are actually incorrect usages, but there are occasionally instances where they are what you really want. Instead of simply ignoring these warnings there are simple workarounds for almost all of the warnings if you insist on doing things this way.

This sort of contrived snippet is a commonly used construct in C to set and test a variable in as few lines as possible :

```
int flag;

if (flag = IsPrime(13)) {
    ...
}
```

The compiler will give a warning about a possibly unintended assignment. This is because it is more common to have a boolean test in the `if` clause using the equality operator `==` rather than to take advantage of the return value of the assignment operator. This snippet could better be written as :

```
int flag;

if ((flag = IsPrime(13)) != 0) {
    ...
}
```

so that the test for the 0 value is made explicit. The code generated will be the same, and it will make us and the compiler happy at the same time. Alternately, you can enclose the entire test in another set of parentheses to indicate your intentions.

`-Idir` Adds the directory *dir* to the list of directories searched for include files. There are a variety of standard directories that will be searched by the compiler by default, for standard library and system header files, but sometimes you need to specify an additional directory for the compiler to find include files. There is no space between the option flag and the directory name.

`-lmylib` Search the library named *mylib* for unresolved names when linking. The actual name of the file will be `libmylib.a`, and must be found in either the default locations for libraries or in a directory added with the `-L` flag.

The position of the `-l` flag in the option list is important because the linker will not go back to previously examined libraries to look for unresolved names. For example, if you are using a library that requires the math library it must appear before the math library on the command line otherwise a link error will be reported. Again, there is no space between the option flag and the library file name, and that's a lower case 'L', not the digit '1'.

`-Ldir` Adds the directory *dir* to the list of directories searched for library files specified by the `-l` flag. Here too, there is no space between the option flag and the library directory name.

Section 2 — make

Typing out the `gcc` commands for a project gets less appealing as the project gets bigger. The “make” utility automates the process of compiling and linking. With `make`, the programmer specifies what the files are in the project and how they fit together, and then `make` takes care of the appropriate compile and link steps. Besides the advantage of less typing, `make` can speed up your compiles since it is smart enough to know that if you have 10 `.c` files but you have only changed one, then only that one file needs to be compiled before the link step. `Make` has some complex features, but just using it for simple things is pretty simple.

Running make

Go to your project directory and run `make` right from the shell with no arguments, or in emacs (below) `[esc]-x compile` will do basically the same thing. In any case, `make` looks in the current directory for a file called `Makefile` or `makefile` for its build instructions. If there is a problem building one of the targets along the way the error messages are written to standard error or the emacs compilation buffer.

Makefiles

A makefile consists of a series of variable definitions and dependency rules. A variable in a makefile is a name defined to represent some string of text. This works much like macro replacement in the C pre-processor. Variables are most often used to represent a list of directories to search, options for the compiler, and names of programs to run. A variable is declared when it is set to a value. For example, the line :

```
CC = gcc
```

will create a variable named `CC`, and set its value to be `gcc`. The name of the variable is case sensitive, and traditionally make variable names are in all capital letters.

While it is possible to define your own variables there are some that are considered standard, and using them along with the default rules makes writing a makefile much easier. The most important variables are: `CC`, `CFLAGS`, and `LDLFLAGS`.

<code>CC</code>	The name of the C compiler, this will default to <code>cc</code> or <code>gcc</code> in most versions of make.
<code>CFLAGS</code>	A list of options to pass on to the C compiler for all of your source files. This is commonly used to set the include path to include non-standard directories or build debugging versions, the <code>-I</code> and <code>-g</code> compiler flags.
<code>LDLFLAGS</code>	A list of options to pass on to the linker. This is most commonly used to set the library search path to non-standard directories and to include application specific library files, the <code>-L</code> and <code>-l</code> compiler flags.

Referencing the value of a variable is done by having a `$` followed by the name of the variable within parenthesis or curly braces. For example:

```
CFLAGS = -g -I/usr/class/cs107/include
$(CC) $(CFLAGS) -c binky.c
```

The first line sets the value of the variable `CFLAGS` to turn on debugging information and add the directory `/usr/class/cs107/include` to the include file search path. The second line uses the value of the variable `CC` as the name of the compiler to use passing to it the compiler options set in the previous line (all of these options are explained below). If you use a variable that has not been previously set in the makefile, `make` will use the empty definition, an empty string.

The second major component of makefiles are dependency/build rules. A rule tells how to make a target based on changes to a list of certain files. The ordering of the rules does not make any difference, except that the first rule is considered to be the default rule. The default rule is the rule that will be invoked when `make` is called without arguments (the most common way).

A rule generally consists of two lines: a dependency line followed by a command line. Here is an example rule :

```
binky.o : binky.c binky.h akbar.h
tab$(CC) $(CFLAGS) -c binky.c
```

The dependency line says that the object file `binky.o` must be rebuilt whenever any of `binky.c`, `binky.h`, or `akbar.h` are changed. The target `binky.o` is said to depend on these three files. Basically, an object file depends on its source file and any non-system files that it includes. The programmer is responsible for expressing the dependencies between the source files in the makefile. In the above example, apparently the source code in `binky.c` `#includes` both `binky.h` and `akbar.h` — if any of those files change, then `binky.c` must be re-compiled. (The `make depend` facility tries to automate that authoring of the makefile, but it's beyond the scope of this document.)

The command line lists the commands that build `binky.o` — invoking the C compiler with whatever compiler options have been previously set (actually there can be multiple command lines). Essentially, the dependency line is a trigger which says when to do something. The command line specifies what to do.

The command lines must be indented with a `tab` character— just using spaces will not work, even though the spaces will sort of look right in your editor. (This design is a result of a famous moment in the early days of `make` when they realized that the `tab` format was a terrible design, but they decided to keep it to remain backward compatible with their user base — on the order of 10 users at the time. There's a reason the word “backward” is in backward compatible. Best to not think about it.)

Because of the `tab` vs. `space` problem, make sure you are not using an editor or tool which might substitute space characters for an actual `tab`. This can be a problem when using copy/paste from some terminal programs. To check whether you have a `tab` character on that line, move to the beginning of that line and try to move one character to the right. If the cursor skips 8 positions to the right, you have a `tab`. If it moves space by space, then you need to delete the spaces and retype a `tab` character.

For standard compilations, the command line can be omitted, and `make` will use a default build rule for the source file based on its extension, `.c` for C files, `.f` for Fortran files, and so on. The default build rule for C files looks like...

```
$(CC) $(CFLAGS) -c source-file.c
```

It's very common to rely on the above default build rule — most adjustments can be made by changing the `CFLAGS` variable. Below is a simple but typical looking makefile. It compiles the C source contained in the files `main.c`, `binky.c`, `binky.h`, `akbar.c`, `akbar.h`, and `defs.h`. These files will produce intermediate files `main.o`, `binky.o`, and `akbar.o`. Those files will be linked together to produce the executable file `program`. Blank lines are ignored in a makefile, and the comment character is `'#'`.

```
CC = gcc
CFLAGS = -g -I/usr/class/cs107/include
LDFLAGS = -L/usr/class/cs107/lib -lgraph
```

```
PROG = program
HDRS = binky.h akbar.h defs.h
SRCS = main.c binky.c akbar.c
```

```
## This incantation says that the object files
## have the same name as the .c files, but with .o
OBJS = $(SRCS:.c=.o)
```

```

## This is the first rule (the default)
## Build the program from the three .o's
$(PROG) : $(OBJS)
tab$(CC) $(LD_FLAGS) $(OBJS) -o $(PROG)

## Rules for the source files -- these do not have
## second build rule lines, so they will use the
## default build rule to compile X.c to make X.o
main.o : main.c binky.h akbar.h defs.h

binky.o : binky.c binky.h

akbar.o : akbar.c akbar.h defs.h

## Remove all the compilation and debugging files
clean :
tabrm -f core $(PROG) $(OBJS)

## Build tags for these sources
TAGS : $(SRCS) $(HDRS)
tabetags -t $(SRCS) $(HDRS)

```

The first (default) target builds the program from the three .o's. The next three targets such as “main.o : main.c binky.h akbar.h defs.h” identify the .o's that need to be built and which source files they depend on. These rules identify what needs to be built, but they omit the second line build rule. Therefore they will use the default rule which knows how to build one .o from one .c with the same name. Finally, make automatically knows that a .o always depends on its source .c, so the main.c, binky.c, and akbar.c dependencies could have been omitted from the three dependency lines.

The later targets, clean and TAGS, perform other convenient operations. The clean target is used to remove all of the object files, the executable, and a core file if you've been debugging, so that you can perform the build process from scratch. You can make clean if you want to recover space by removing all the compilation and debugging output files. You also may need to make clean if you move to a system with a different architecture from where your object libraries were originally compiled, and so you need to recompile from scratch. The TAGS rule creates a tag file that most Unix editors can use to search for symbol definitions.

Compiling in Emacs

Emacs has built-in support for the compile process. To compile your code from emacs, type `M-x compile`. You will be prompted for a compile command. If you have a makefile, just type `make` and hit return. The makefile will be read and the appropriate commands executed. The emacs buffer will split at this point, and compile errors will be brought up in the newly created buffer. In order to go to the line where a compile error occurred, place the cursor on the line which contains the error message and hit `^c-^c`. This will jump the cursor to the line in your code where the error occurred (“cc” is the historical name for the C compiler).

Section 3 — *gdb*

You may run into a bug or two in your programs. There are many techniques for finding bugs, but a good debugger can make the job a lot easier. In most programs of any significant size, it is not possible to track down all of the bugs in a program just by staring at the source — you need to see clues in the runtime behavior of the program to find the bug. It's worth investing time to learn to use debuggers well.

GDB

We recommend the GNU debugger *gdb*, since it basically stomps on *dbx* in every possible area and works nicely with the *gcc* compiler. Other nice debugging environments include *ups* and *CodeCenter*, but these are not as universally available as *gdb*, and in the case of *CodeCenter* not as cheaply. While *gdb* does not have a flashy graphical interface as do the others, it is a powerful tool that provides the knowledgeable programmer with all of the information they could possibly want and then some.

This section does not come anywhere close to describing all of the features of *gdb*, but will hit on the high points. There is on-line help for *gdb* which can be seen by using the `help` command from within *gdb*. If you want more information try `xinfo` if you are logged onto the console of a machine with an X display or use the info-browser mode from within *emacs*.

Starting the debugger

As with *make* there are two different ways of invoking *gdb*. To start the debugger from the shell just type...

```
gdb program
```

where *program* is the name of the target executable that you want to debug. If you do not specify a target then *gdb* will start without a target and you will need to specify one later before you can do anything useful.

As an alternative, from within *emacs* you can use the command `[Esc]-x gdb` which will then prompt you for the name of the executable file. You cannot start an inferior *gdb* session from within *emacs* without specifying a target. The *emacs* window will then split between the *gdb* buffer and a separate buffer showing the current source line.

Running the debugger

Once started, the debugger will load your application and its symbol table (which contains useful information about variable names, source code files, etc.). This symbol table is the map produced by the `-g` compiler option that the debugger reads as it is running your program.

The debugger is an interactive program. Once started, it will prompt you for commands. The most common commands in the debugger are: setting breakpoints, single stepping, continuing after a breakpoint, and examining the values of variables.

Running the Program

```
run
```

Reset the program, run (or rerun) from the beginning. You can supply command-line arguments the same way you can supply command-line arguments to your executable from the shell.

<code>step</code>	Run next line of source and return to debugger. If a subroutine call is encountered, follow into that subroutine.
<code>step count</code>	Run <i>count</i> lines of source.
<code>next</code>	Similar to <code>step</code> , but doesn't step into subroutines.
<code>finish</code>	Run until the current function/method returns.
<code>return</code>	Make selected stack frame return to its caller.
<code>jump address</code>	Continue program at specified line or address.

When a target executable is first selected (usually on startup) the current source file is set to the file with the main function in it, and the current source line is the first executable line of the this function.

As you run your program, it will always be executing some line of code in some source file. When you pause the program (when the flow of control hits a “breakpoint” or by typing Control-C to interrupt), the “current target file” is the source code file in which the program was executing when you paused it. Likewise, the “current source line” is the line of code in which the program was executing when you paused it.

Breakpoints

You can use breakpoints to pause your program at a certain point. Each breakpoint is assigned an identifying number when you create it, and so that you can later refer to that breakpoint should you need to manipulate it.

A breakpoint is set by using the command `break` specifying the location of the code where you want the program to be stopped. This location can be specified in several ways, such as with the file name and either a line number or a function name within that file (a line needs to be a line of actual source code — comments and whitespace don't count). If the file name is not specified the file is assumed to be the current target file, and if no arguments are passed to `break` then the current source line will be the breakpoint. `gdb` provides the following commands to manipulate breakpoints:

<code>info break</code>	Prints a list of all breakpoints with numbers and status.
<code>break function</code>	Place a breakpoint at start of the specified function
<code>break linenumber</code>	Prints a breakpoint at line, relative to current source file.
<code>break filename:linenumber</code>	Place a breakpoint at the specified line within the specified source file.

You can also specify an *if* clause to create a conditional breakpoint:

<code>break fn if expression</code>	Stop at the breakpoint, only if <i>expression</i> evaluates to true. Expression is any valid C expression, evaluated within current stack frame when hitting the breakpoint.
-------------------------------------	--

<code>disable <i>breaknum</i></code>	Disable/enable breakpoint identified by <i>breaknum</i> ..
<code>enable <i>breaknum</i></code>	
<code>delete <i>breaknum</i></code>	Delete the breakpoint identified by <i>breaknum</i> .
<code>commands <i>breaknum</i></code>	Specify commands to be executed when <i>breaknum</i> is reached. The commands can be any list of C statements or gdb commands. This can be useful to fix code on-the-fly in the debugger without re-compiling (Woo Hoo!).
<code>cont</code>	Continue a program that has been stopped.

For example, the commands...

```
break binky.c:120
break DoGoofyStuff
```

set a breakpoint on line 120 of the file `binky.c` and another on the first line of the function `DoGoofyStuff`. When control reaches these locations, the program will stop and give you a chance to look around in the debugger.

Gdb (and most other debuggers) provides mechanisms to determine the current state of the program and how it got there. The things that we are usually interested in are (a) where are we in the program? and (b) what are the values of the variables around us?

Examining the stack

To answer question (a) use the `backtrace` command to examine the run-time stack. The run-time stack is like a trail of breadcrumbs in a program; each time a function call is made, a crumb is dropped (an run-time stack frame is pushed). When a return from a function occurs, the corresponding stack frame is popped and discarded. These stack frames contain valuable information about the sequence of callers which brought us to the current line, and what the parameters were for each call.

Gdb assigns numbers to stack frames counting from zero for the innermost (currently executing) frame. At any time gdb identifies one frame as the “selected” frame. Variable lookups are done with respect to the selected frame. When the program being debugged stops (at a breakpoint), gdb selects the innermost frame. The commands below can be used to select other frames by number or address.

<code>backtrace</code>	Show stack frames, useful to find the calling sequence that produced a crash.
<code>frame <i>framenum</i></code>	Start examining the frame with <i>framenum</i> . This does not change the execution context, but allows to examine variables for a different frame.
<code>down</code>	Select and print stack frame called by this one. (The metaphor here is that the stack grows down with each function call.)
<code>up</code>	Select and print stack frame that called this one.

`info args` Show the argument variables of current stack frame.

`info locals` Show the local variables of current stack frame.

Examining source files

Another way to find our current location in the program and other useful information is to examine the relevant source files. `gdb` provides the following commands:

`list linenum` Print ten lines centered around *linenum* in current source file.

`list function` Print ten lines centered around beginning of *function* (or *method*).

`list` Print ten more lines.

The `list` command will show the source lines with the current source line centered in the range. (Using `gdb` from within `emacs` makes these command obsolete since it does all of the current source stuff for you.)

Examining data

To answer the question (b) “what are the values of the variables around us?” use the following commands...

`print expression` Print value of *expression*. Expression is any valid C expression, can include function calls and arithmetic expressions, all evaluated within current stack frame.

`set variable = expression` Assign value of *variable* to *expression*. You can set any variable in the current scope. Variables which begin with `$` can be used as temporary variables local to `gdb`.

`display expression` Print value of *expression* each time the program stops. This can be useful to watch the change in a variable as you step through code.

`undisplay` Cancels previous display requests.

In `gdb`, there are two different ways of displaying the value of a variable: a snapshot of the variable’s current value and a persistent display for the entire life of the variable. The `print` command will print the current value of a variable, and the `display` command will make the debugger print the variable's value on every step for as long as the variable exists. The desired variable is specified by using C syntax. For example...

```
print x.y[3]
```

will print the value of the fourth element of the array field named `y` of a structure variable named `x`. The variables that are accessible are those of the currently selected function's activation frame, plus all those whose scope is global or static to the current target file. Both the `print` and `display` functions can be used to evaluate arbitrarily complicated

expressions, even those containing, function calls, but be warned that if a function has side-effects a variety of unpleasant and unexpected situations can arise.

Shortcuts

Finally, there are some things that make using gdb a bit simpler. All of the commands have short-cuts so that you don't have to type the whole command name every time you want to do something simple. A command short-cut is specified by typing just enough of the command name so that it unambiguously refers to a command, or for the special commands `break`, `delete`, `run`, `continue`, `step`, `next` and `print` you need only use the first letter. Additionally, the last command you entered can be repeated by just hitting the return key again. This is really useful for single stepping for a range while watching variables change.

Miscellaneous

<code>editmode</code> <i>mode</i>	Set editmode for gdb command line. Supported values for <i>mode</i> are <code>emacs</code> , <code>vi</code> , <code>dumb</code> .
<code>shell</code> <i>command</i>	Execute the rest of the line as a shell command.
<code>history</code>	Print command history.

Debugging Strategies

Some people avoid using debuggers because they don't want to learn another tool. This is a mistake. Invest the time to learn to use a debugger and all its features — it will make you much more productive in tracking down problems.

Sometimes bugs result in program crashes (a.k.a. “core dumps”, “register dumps”, etc.) that bring your program to a halt with a message like “Segmentation Violation” or the like. If your program has such a crash, the debugger will intercept the signal sent by the processor that indicates the error it found, and allow you to examine the state program. Thus with almost no extra effort, the debugger can show you the state of the program at the moment of the crash.

Often, a bug does not crash explicitly, but instead produces symptoms of internal problems. In such a case, one technique is to put a breakpoint where the program is misbehaving, and then look up the call stack to get some insight about the data and control flow path that led to the bad state. Another technique is to set a breakpoint at some point before the problems start and step forward towards the problems, examining the state of the program along the way.

Section 4 — emacs

The following is a quick introduction to the “emacs” text editor which is a free program produced by GNU (www.gnu.org). It's a fine editor, and it happens to integrate with many other Unix tools nicely. There's a fabulous history of various editor adherents having long and entertaining arguments about why their editor is best, but we're just going to avoid that subject entirely.

To start editing a new or existing file using emacs, simply type the following to the UNIX prompt...

```
emacs filename
```

where *filename* is the file to be edited. The X-Windows version of emacs is called `xemacs`, and if you're using it... well just look in the menus. The commands are all the same, but you don't have to remember the funny key-combinations.

All the fancy editing commands, such as find-and-replace, are invoked through typing special key sequences. Two important key sequences to remember are: `^x` (holding down the “ctrl” key while typing “x”) and `[esc]-x` (simply pressing the “esc” key followed by typing “x”), both of which are used to start many command sequences. Note that for historical reasons in most user manuals for emacs, the “esc” key is actually referred to as the “Meta” or “M-” key. Therefore, you may see the `[esc]-x` written as equivalently as `M-x`.

To save the file being edited the sequence is `^x^s`. To exit (and be prompted to save) emacs, the sequence is `^x^c`. To open another file within emacs, the sequence is `^x^f`. This sequence can be used to open an existing file as well as a new file. If you have multiple files open, emacs stores them in different “buffers”. To switch from one buffer to another (very handy when you are editing a `.c` source file and need to refer to the prototypes and definitions in the `.h` header file), you use the key sequence `^x-b` (note the “b” is typed plain). You can then enter the name of the file to switch to the corresponding buffer (a default name is provided for fast switching). The arrow keys usually work as the cursor movement keys, but there are other navigation key combinations listed below.

Running emacs

<code>emacs <filename></code>	Run emacs (on a particular file). Make sure you don't already have an emacs job running which you can just revive with <code>fg</code> . Adding a <code>'&'</code> after the above command will run emacs in the background, freeing up your shell)
<code>^z</code>	Suspend emacs— revive with <code>%</code> command above, or the <code>fg</code> command
<code>^x^c</code>	Quit emacs
<code>^x^f</code>	Load a new file into emacs
<code>^x^v</code>	Load a new file into emacs and unload previous file
<code>^x^s</code>	Save the file
<code>^x-k</code>	Kill a buffer

Moving About

<code>^f</code>	Move forward one character
<code>^b</code>	Move backward one character
<code>^n</code>	Move to next line
<code>^p</code>	Move to previous line

<code>^a</code>	Move to beginning of line
<code>^e</code>	Move to end of line
<code>^v</code>	Scroll down a page
<code>M-v</code>	Scroll up a page
<code>M-<</code>	Move to beginning of document
<code>^x-[</code>	Move to beginning of page
<code>M-></code>	Move to end of document
<code>^x-]</code>	Move to end of page
<code>^l</code>	Redraw screen centered at line under the cursor
<code>^x-o</code>	Move to other screen
<code>^x-b</code>	Switch to another buffer

Searching

<code>^s</code>	Search for a string
<code>^r</code>	Search for a string backwards from the cursor (quit both of these with <code>^f</code>)
<code>M-%</code>	Search-and-replace

Deleting

<code>^d</code>	Deletes letter under the cursor
<code>^k</code>	Kill from the cursor all the way to the end of the line
<code>^y</code>	Yanks back all the last kills. Using the <code>^k ^y</code> combination you can get a cut-paste effect to move text around

Regions

emacs defines a region as the space between the mark and the point. A mark is set with `^-space` (control-spacebar). The point is at the cursor position.

<code>M-w</code>	Copy the region
<code>^w</code>	Delete the region. Using <code>^y</code> will also yank back the last region killed or copied — this is the way to get a cut/copy/paste effect with regions.

Screen Splitting

<code>^x-2</code>	Split screen horizontally
<code>^x-3</code>	Split screen vertically
<code>^x-1</code>	Make active window the only screen
<code>^x-0</code>	Make other window the only screen

Miscellaneous

<code>M-$\\$</code>	Check spelling of word at the cursor
<code>^g</code>	In most contexts, cancel, stop, go back to normal command
<code>M-x goto-line <i>num</i></code>	Goes to the given line number
<code>^x-u</code>	Undo
<code>M-x shell</code>	Start a shell within emacs

Compiling

`M-x compile` Compile code in active window. Easiest if you have a makefile set up.

`^c ^c` Do this with the cursor in the compile window, scrolls to the next compiler error. Cool!

Getting Help

`^h` emacs help

`^h t` Run the emacs tutorial

emacs does command completion for you. Typing `M-x space` will give you a list of emacs commands. There is also a man page on emacs. Type `man emacs` in a shell.

Printing Your Source Files

There's a really neat way to print out hardcopies of your source files. Use a command called "enscript". Commonly, it's used at the Unix command line as follows:

```
enscript -2GrPsweet5 binky.c lassie.c *.h
```

Where we want to print the two source files `binky.c` and `lassie.c`, as well as all of the header files to printer `sweet5`. You can change these parameters to fit your needs.

Section 5 — Unix Shell

This section summarizes many of the commands used in the Unix shell.

Directory Commands

`cd directory` Change directory. If *directory* is not specified, goes to home directory.

`pwd` Show current directory (*print working directory*)

`ls` Show the contents of a directory. `ls -a` will also show files whose name begins with a dot. `ls -l` shows lots of miscellaneous info about each file

`rm file` Delete a file

`mv old new` Rename a file from *old* to *new* (also works for moving things between directories). If there was already a file named *new*, it gets overwritten.

`cp old new` Creates a file named *new* containing the same thing as *old*. If there was already a file named *new*, it is overwritten.

`mkdir name` Create a directory

`rmdir name` Delete a directory. The directory must be empty.

Shorthand Notations & Wildcards

`.` Current directory

`..` Parent directory

`~` Your home directory

`~user` Home directory of *user*

`*` Any number of characters (not `'`) Ex: `*.c` is all files ending in `'c'`

`?` Any single character (not `'`)

Miscellaneous Commands

<code>cat file</code>	Print the contents of <i>file</i> to standard output
<code>more file</code>	Same as <code>cat</code> , but only a page at a time (useful for displaying)
<code>less file</code>	Same as <code>more</code> , but with navigability (<code>less</code> is more)
<code>w</code>	Find out who is on the system and what they are doing
<code>ps</code>	List all your currently active processes
<code>jobs</code>	Show jobs that have been suspended
<code>program&</code>	Runs <i>program</i> in the background
<code>ctrl-z</code>	Suspend the current program
<code>%</code>	Continue last job suspended, or use <code>fg</code> (foreground)
<code>% number</code>	Continue a particular job
<code>kill process-id</code>	Kill a process
<code>kill -9 process</code>	Kill a process with extreme prejudice
<code>grep exp files</code>	Search for an expression in a set of files
<code>wc file</code>	Count words, lines, and characters in a file
<code>script</code>	Start saving everything that happens in a file. type exit when done
<code>lpr file</code>	Print <i>file</i> to the default printer
<code>lpr -Pinky file</code>	Print <i>file</i> to the printer named <i>inky</i>
<code>diff file1 file2</code>	Show the differences between two files
<code>telnet hostname</code>	Log on to another machine
<code>source file</code>	Execute the lines in the given file as if they were typed to the shell

Getting Help

<code>man subject</code>	Read the manual entry on a particular subject
<code>man -k keyword</code>	Show all the manual pages for a particular keyword

History

<code>history</code>	Show the most recent commands executed
<code>!!</code>	Re-execute the last command
<code>!number</code>	Re-execute a particular command by number
<code>!string</code>	Re-execute the last command beginning with string
<code>^wrong^right^</code>	Re-execute the last command, substituting right for wrong
<code>ctrl-P</code>	Scroll backwards through previous commands

Pipes

<code>a > b</code>	Redirect a's standard output to overwrite file b
<code>a >> b</code>	Redirect a's standard output to append to the file b
<code>a >& b</code>	Redirect a's error output to overwrite file b
<code>a < b</code>	Redirect a's standard input to read from the file b
<code>a b</code>	Redirect a's standard output to b's standard input